

ME 804K

musikelectronic geithain



STUDIO MONITORING SYSTEMS

HIGHEND LOUDSPEAKER

SOUND REINFORCEMENT SYSTEMS



musikelectronic geithain

ME 804K

ME 804K

With the launch of the new 800 line, Musikelectronic Geithain opens a new chapter in the history of development of its studio and high-end loudspeakers. The new high-performance systems set sound and technology standards for both studio application and home audio. The experience from three decades of loudspeaker making was incorporated into the development of these products, applying well-proven and consequently refined solutions such as our *MCDs Coax (Minimum Colouration Directivity Steering Coax)* and our *K Technology (K = "Kardioid")*. Top-level quality is guaranteed due to complete fabrication in our Saxon manufacture.

The 3-way concept of the ME 804K consists of two 8-inch long-stroke woofer systems, an 8-inch midrange system and a tweeter array with three vertically arranged 1-inch tweeter calottes. The directivity of the system has been optimised for listening distances of between 2.8 and 6 metres, rendering a natural sound image in stereo and multichannel operation. One 1000 W and two 500 W amplifier modules supply the bass, mid and treble channels with sufficient power. The resulting overload safety ensures that even signals with highest peak levels are not limited. Also, sound pressure levels of up to 120 dB can be performed without audible distortions throughout the effective frequency range. A room compensation network, integrated into the amplifier electronics, allows control of the room-dependent frequency response.

The vertical arrangement of the 8-inch woofers provides a directivity index that ensures realistic bass presence even at listening distances of up to six metres. Our reliable *K Technology* minimises rearward-directed room reflections in the bass range and simplifies the positioning of the ME 804K in the listening room.

The low-discolouration and low-distortion characteristics of the 8-inch midrange system result from the intelligent combination of several construction details. For instance, the cone loudspeaker – just like the two woofer systems – is operated with a rearward-directed acoustic flow resistor in the cabinet in order to achieve the desired cardioid directivity. This solution also minimises midrange room reflexions which might arise due to the location of the loudspeaker.

Frequently used wave guides in front of tweeter systems make directivity control easy. However, they tend to produce unavoidable discolourations due to short-time reflections on the inner horn surface. We take a different approach by using a tweeter array and doing without horn loudspeaker systems for sound level enhancement. The tweeter unit that is arranged coaxially in front of the midrange system guarantees the trademark low-colouration reproduction of music and speech and generates the closeness to the sound event that the listener desires.

All these features make the ME 804K so unique in the loudspeaker market. It has been optimised for large listening distances and for acoustically less attenuated rooms.



TECHNICAL PROPERTIES



GENERAL

Active 3-way High-Performance-Loudspeaker for hearing distances between 2,80 and 6 m

MAXIMUM SPL
TO IEC 268-1
PROGRAMME MATERIAL

≥ 114 dB
120 dB peak / r = 1 m (3.3 ft)

BANDWIDTH

28 Hz ... 22 kHz - 6 dB

CALIBRATION: ACOUSTIC OUTPUT LEVEL / $P_e = -14$ dBu

90 dB / r = 1 m (3.3 ft)

DIRECTIVITY INDEX
FROM 100 Hz ... 10 kHz

increasing from 3 to 10 dB

INHERENT NOISE SOUND LEVEL

≤ 10 dB (A) / r = 1 m (3.3 ft)

TOTAL HARMONIC DISTORTION
MEASURED AT 96 dB / r = 1 m (3.3 ft)
FROM 100 Hz ... 10 kHz

≤ -45 dB

NOMINAL INPUT LEVEL

+6 dBu adjustable

INPUT IMPEDANCE

≥ 10 kOhm RC symmetrically

ELECTRONIC CROSSOVER FREQUENCIES

380 Hz and 2 kHz

OUTPUT POWER PWM-AMPLIFIER

LF

max. 1000 Watt / 4 Ohm

MF

max. 500 Watt / 4 Ohm

HF

max. 500 Watt / 4 Ohm

POWER REQUIREMENTS

90 ... 132 V, 55 ... 65 Hz; 190 ... 265 V, 45 ... 55 Hz

POWER CONSUMPTION

30 VA at standby; max. 1000 VA at full load

MAINS CONNECTION

Euro cold-unit connector with HF-filter

OPERATION AND CLIPPING INDICATOR

LED on front side

INPUT CONNECTOR

XLR 3F (programme input)

OUTPUT CONNECTOR

XLR 3M (bass expansion)

LOUDSPEAKER SYSTEMS

WOOFER

2x 200 mm (8") cone

MID-RANGE UNIT

1x 200 mm (8") cone

TWEETER

3x 25 mm (1") dome

DIMENSIONS (H x W x D)

1100 x 306 x 342 mm (43.4 x 12.1 x 13.5 in)

WEIGHT

53.8 kg (118.4 lbs)

TEMPERATURE REQUIREMENTS

FOR USE

+15°C ... +35°C (59°F ... 95°F)

FOR STORAGE

-25°C ... +45°C (-13°F ... 113°F)




HUMIDITY

45 ... 75 %

DESIGN OF THE CABINET

MDF-wood in Tineo veneered,
different veneers or colors optional

Acoustic diagrams

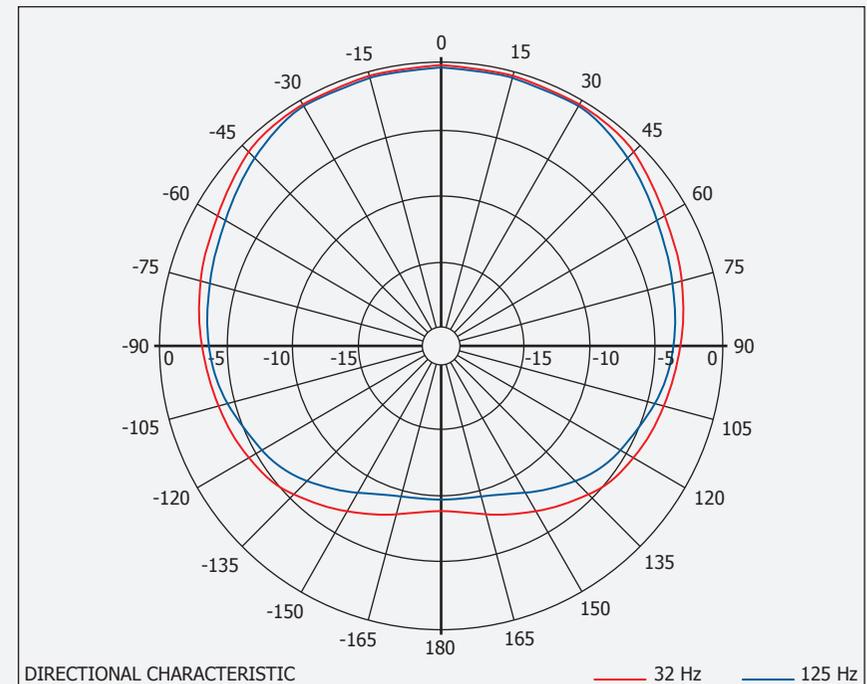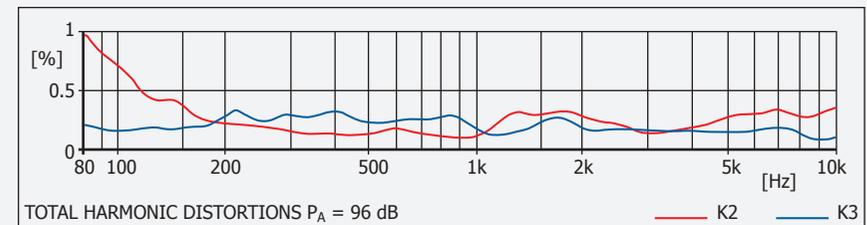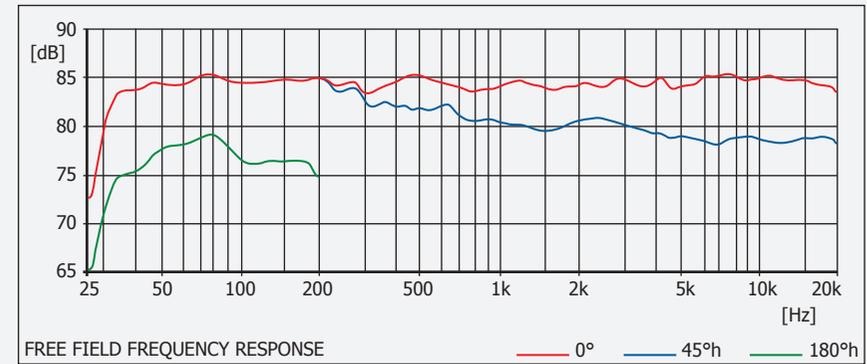

musikelectronic geithain gmbh

STUDIO MONITORING - HIGHEND LOUDSPEAKER - SOUND REINFORCEMENT SYSTEMS

Nikolaistraße 7
04643 Geithain / Germany

Tel: +49 (0) 34341 3110
Fax: +49 (0) 34341 31144

E-Mail: info@me-geithain.de

www.me-geithain.de